

M12S

Stecker der Schutzklasse I
plug for safety class I

Zweipolig mit Schutzkontakt,
spritzwassergeschützt IP 44
*2-pole plug with earthing-contact
splash-proof IP 44*

CH-Typ 12 10 A, 250 V~,
SEV 1011:09+A1:12
IEC 60884-1:2002 (Ed.3)

Teilisierte Stifte, vernickelt
*pins provided with insulation sleeves,
nickel-plated*




PASSENDE ANSCHLUSSLEITUNGEN

suitable flexible cord types

H05VV-F	3 G 0,75
H05VV-F	3 G 1,00
H05VV-F	3 G 1,50
H05BQ-F	3 G 0,75
H05BQ-F	3 G 1,00
H05BQ-F	3 G 1,50
H05RN-F	3 G 0,75
H05RN-F	3 G 1,00
H05RR-F	3 G 0,75
H05RR-F	3 G 1,00
H05RR-F	3 G 1,50
H07RN-F	3 G 1,00
H07RN-F	3 G 1,50

TECHNISCHE ZEICHNUNG

technical drawing

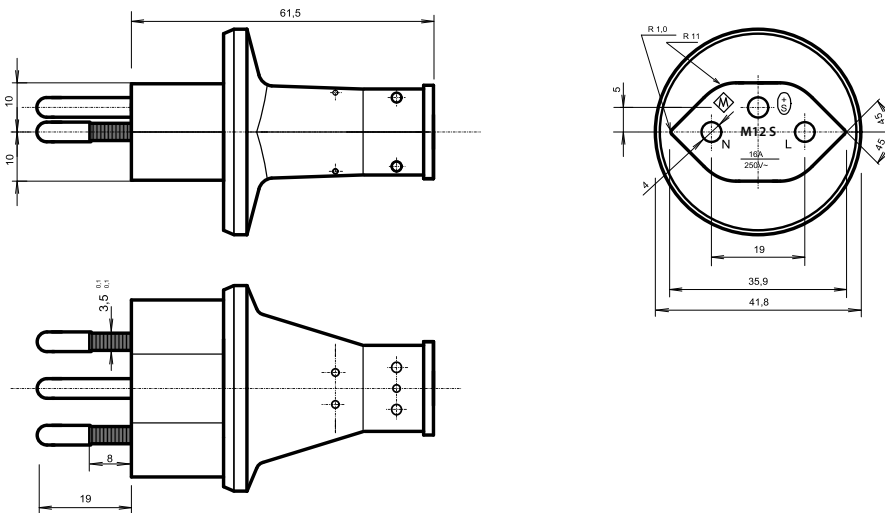

APPROBATIONEN

approvals

SCHWEIZ
Switzerland

