

M 24S

Kupplungsdose der Schutzklasse I
portable socket-outlet for safety class I

Zweipolige Kupplung mit
Schutzkontakt, spritzwassergeschützt
IP 44

*2-pole with earthing-contact,
splash proof IP 44*

SEV 1011:98, IEC 60884-1:02,
CH-Typ 23, 16 A, 250 V~
Normblatt 5934-1
specification sheet 5934-1





PASSENDE ANSCHLUSSLEITUNGEN

suitable flexible cord types

H05VV-F	3 G 1,50
H05BQ-F	3 G 1,00
H07BQ-F	3 G 1,50
H07RN-F	3 G 1,50
H07RN-F	3 G 2,50

TECHNISCHE ZEICHNUNG

technical drawing

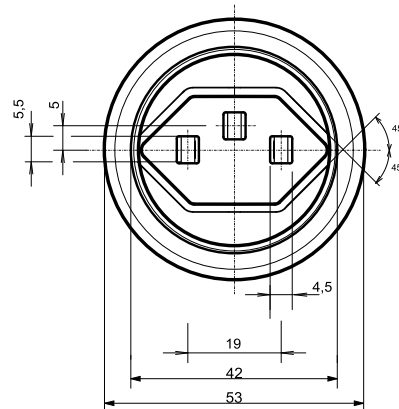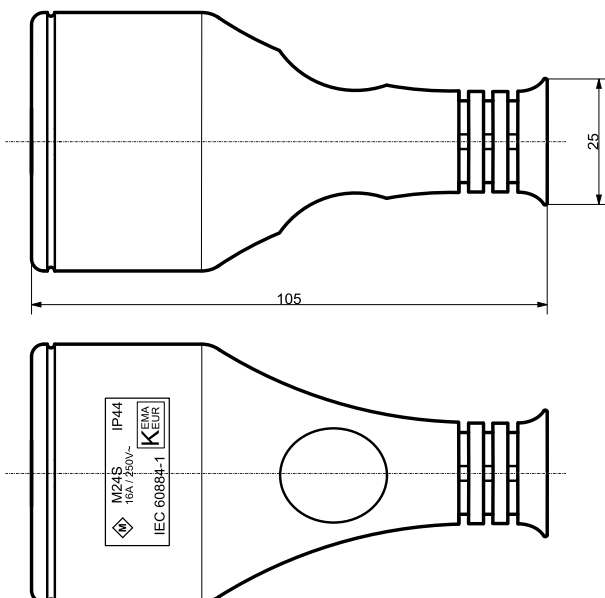

APPROBATIONEN

approvals

SCHWEIZ
Switzerland

