

M 31

Stecker der Schutzklasse I
plug for safety class I

Zweipolig mit zwei Schutzkontakt-
systemen, spritzwassergeschützt IP 44
*2-pole plug with dual earthing-contacts,
splash-proof IP 44*

IEC 60884-1 (ed.3) 16 A, 250 V~

Vollmetallstifte, vernickelt
solid metal pins, nickel-plated




PASSENDE ANSCHLUSSLEITUNGEN

suitable flexible cord types

H03VV-F	3 G 0,75
H05VV-F	3 G 0,75
H05VV-F	3 G 1,00
H05VV-F	3 G 1,50
H05VV-F	3 G 2,50
H05RR-F	3 G 0,75
H05RR-F	3 G 1,00
H05RR-F	3 G 1,50
H05RN-F	3 G 0,75
H05RN-F	3 G 1,00
H07RN-F	3 G 1,00
H07RN-F	3 G 1,50
H05BQ-F	3 G 0,75
H05BQ-F	3 G 1,00
H07BQ-F	3 G 1,50

TECHNISCHE ZEICHNUNG

technical drawing

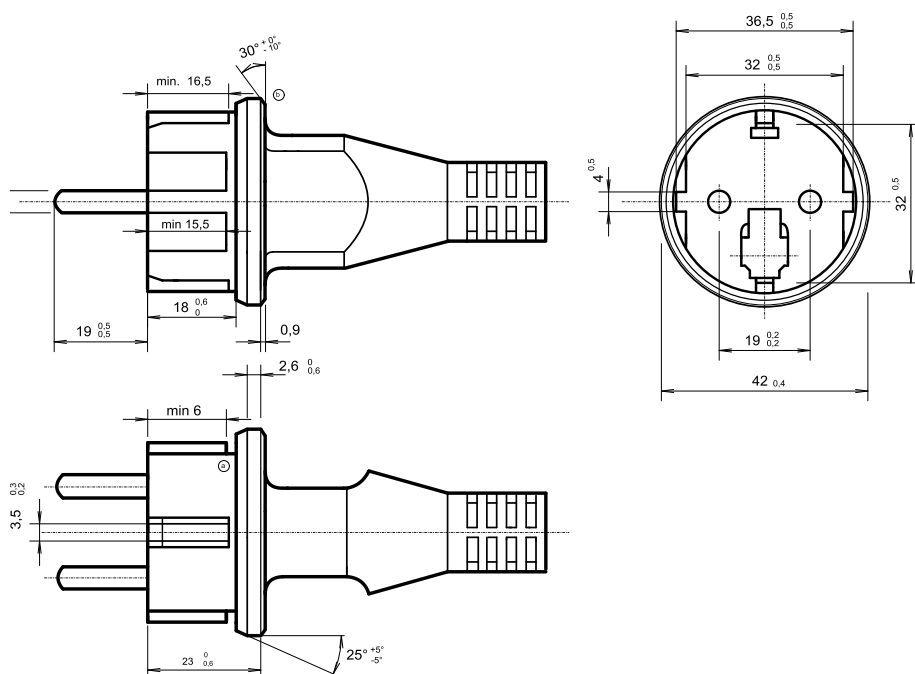

APPROBATIONEN

approvals

BELGIEN
Belgium



NIEDERLANDE
Netherlands

